



G3 THERMAL DECANTER COFFEE BREWING SYSTEM

MODEL : D60GT12A000, D60GT63A000



D60GT12A000

Shown With CLXP6401S100
64 Oz. Thermal Dispenser
(Dispenser Sold Separately)

“Gourmet” flavor is easy with G3 technology and a ThermoPro™ decanter solution. You’ll think it’s magic . . . but it’s just smart brewing.

Brewing and serving great tasting, “gourmet” style coffee is no longer “hocus pocus”. Curtis’ G3 brewing systems make this complex process simple with easy-to-program features including... digital temperature and brew-by-volume control, pre-infusion and pulse technology, preventive maintenance alerts, cold water brew lock-out, and much more.

Add a ThermoPro decanter, and perfectly brewed temperature and gourmet taste is maintained without additional heat. Its direct pour design and brewthrough top makes the the D60 ultra convenient. While its contemporary looks are perfect for the conference rooms, office coffee locations or other applications.

From traditional to gourmet roasts, the Curtis G3 System continually provides you great coffee flavor and increased profits every brew.

ITEM NO

PROJECT

DATE

FEATURES AT A GLANCE

- **Precise “Gourmet” Control Over All Critical Functions** —The G3 Universal Control Module provides you the expertise to brew premium gourmet coffee with ease.
- **Stainless Steel ThermoPro™ Pour Pots Keep Coffee Quality at its Peak of Freshness** — High heat retention design maintains temperature without additional warming.
- **Built-In Fine Tuning Brewing Modes** — Pre-infusion and other modes enhance extraction of gourmet coffee flavor. Cold water brew lock-out prevents brewing when water temperature is below set level.
- **Curtis’ Exclusive G3 3-Year Warranty on Digital Control Components.**
- **Out-of-the-Box Operation** — Pre-programmed factory settings deliver ideal results.
- **Reliability You Can Depend On** — Digital Control Module is encapsulated in high-tech polymer and is impervious to heat, steam and moisture.
- **Intuitive Scroll-Through Precision Programming** — Large, brightly lighted display communicates functions at a glance. Easily adjust time, volume, temperature, brew functions and more.
- **Tamper Resistant** — Changeable access code prevents unauthorized adjustment.
- **Easy-to-Use** — Simple graphic design with color-coded buttons for all operating functions.
- **Saves Operating Costs** — Energy save mode automatically reduces energy consumption when brewer is idle.
- **Reduce Downtime** — G3 on-board self-diagnostics continually sense proper brewing operation. A service phone number and error code will be displayed in the rare event technical assistance is required.
- **Quick and Simple Installation** — Standard 120VAC Operation.

DISPENSER OPTIONS (Sold Separately)



TFT64


64 Oz. Thermal
FreshTrac Dispenser



TFT64D

64 Oz. Thermal
FreshTrac Dispenser Decaf

**D60GT12A000/
D60GT63A000**

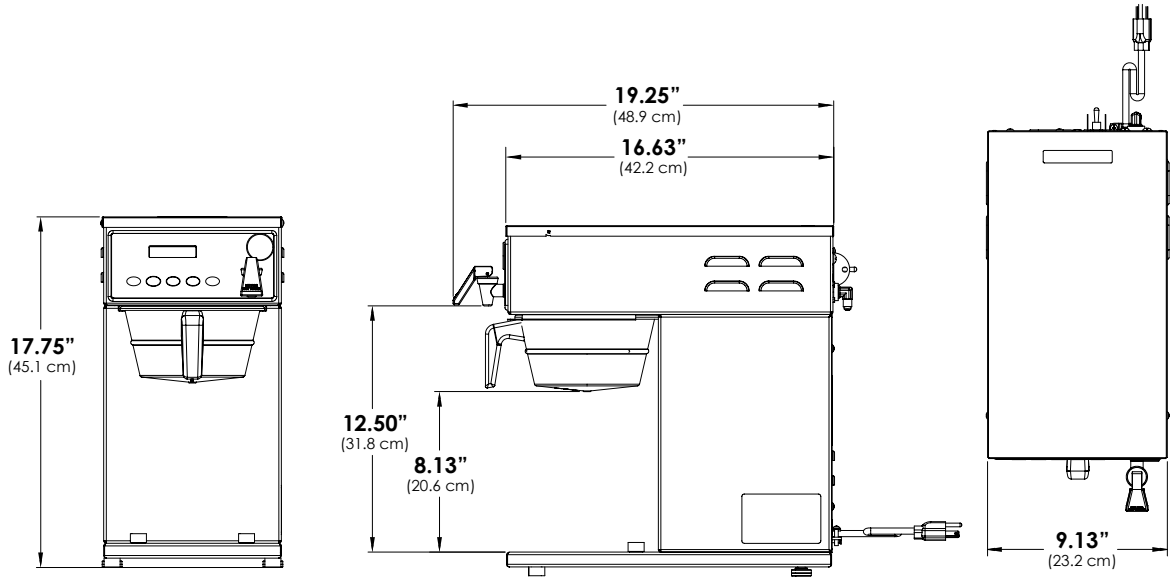

BREWER SPECIFICATIONS

MODEL #	DIMENSIONS (H x W x D)	PHASE	VOLTS	AMPS	WIRE	WATTS	HERTZ	GAL/HR	WATER CONNECTOR	SHIP WEIGHT	SHIP CUBE
D60GT12A000	17.75" x 9.13" x 16.63"	1.0 PH	120V	12.5A	2W+G	1500W	50/60 Hz	4.0	1/4" Flare	30.0 lbs.	4.63 cu. ft.
D60GT63A000	17.75" x 9.13" x 16.63"	1.0 PH	120/220V	14.1/15.0A	2/3W+G	1700/3300W	50/60 Hz	4.0/7.0	1/4" Flare	30.0 lbs.	4.63 cu. ft.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov



WILBUR CURTIS COMPANY, INC.
6913 Acco Street, Montebello, CA 90640-5403
Telephone: 800-421-6150 · 323-837-2300
Fax: 323-837-2406
www.wilburcurtis.com



AUG/2018 – F-3394 rev.D